



Tier1

BloombergNEF

Power the future

TOPCon 210R BIFACIAL 460-475W

High efficiency bifacial modules

· Black frame, Bifacial Transparent



UTILITY



C&I

Module efficiency

23.02%



Better leveled
cost of energy



Better high
temperature stability




Improved low-light
performance



Excellent
bifacial performance

Linear performance guarantee for 30 years

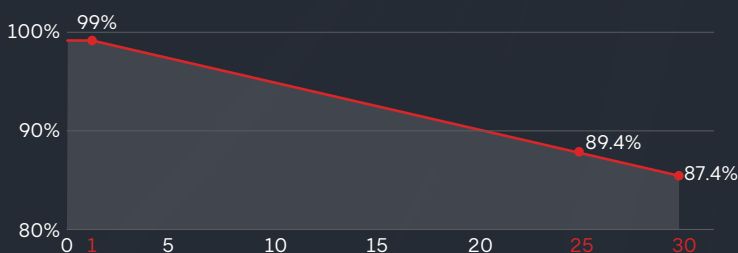

WARRANTY

Quality
Guarantee **30**
years

Power
Warranty **30**
years

CERTIFICATE



Ariel Green



ELECTRIC CHARACTERISTICS

SPDG (460/475W)-N96R12

Model of modules	SPDG460-N96R12		SPDG465-N96R12		SPDG470-N96R12		SPDG475-N96R12	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Power (Pmax/W)	460	348.90	465	353.50	470	357.40	475	361.30
Maximum power voltage (Vmp)	30.39	28.60	30.48	28.80	30.56	28.90	30.65	29.00
Maximum power current (Imp)	15.14	12.18	15.26	12.28	15.38	12.38	15.50	12.47
Open circuit voltage (Voc)	36.3	34.50	36.37	34.60	36.44	34.70	36.50	34.80
Short circuit current (Isc)	15.99	12.88	16.11	12.97	16.23	13.06	16.35	13.16
Module efficiency	23.02%		23.27%		23.52%		23.77%	

STC (Electrical parameters at standard test conditions. STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

NMOT (Irradiance 800W/m², Ambient Temperature 20°C, AM1.5, Wind Speed 1m/s)

ELECTRICAL CHARACTERISTICS WITH 15% REAR SIDE POWER GAIN

Front power Pmax/W	529.00	534.75	540.50	546.25
Maximum power voltage (Vmp)	30.39	30.62	30.84	31.07
Maximum power current (Imp)	17.41	17.46	17.53	17.58
Open circuit voltage (Voc)	36.30	36.54	36.78	37.02
Short circuit current (Isc)	18.39	18.44	18.49	18.54

STRUCTURAL CHARACTERISTICS

Module size (L*W*H)	1762x1134x30mm
Weight	23.8kg
Cell	96 cells, N type Mono-Crystalline, 182.2mm×105 mm
Front glass	2.0mm, Anti-Reflection Coating
Back glass	2.0mm, Heat Strengthened Glass
Frame	Anodized aluminum alloy
Junction box	IP68, 3 bypass diodes
Output wire	4mm ²
Wire length	Line length 1100mm/customized
Connector	NINGBO GZX PV TECHNOLOGY CO.,LTD PV-GZX1500, 1500VDC, 39A, IP68
Packing Specification	37 pcs/Pallet; 962 pcs/40' HQ


OPERATING PARAMETERS

Power tolerance (W)	± 3%
Maximum system voltage (V)	1500V
Maximum rated fuse current (A)	30A
Current operating temperature (C)	-40~+85°C
Mechanical load	+5400Pa/-2400Pa


TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.045% / °C
Temp. Coeff. of Voc (TK Voc)	-0.25% / °C
Temp. Coeff. of Pmax (TK Pmax)	-0.30% / °C
Normal Operating Cell Temperature	45±2°C

MODULE DIMENSIONS(MM)

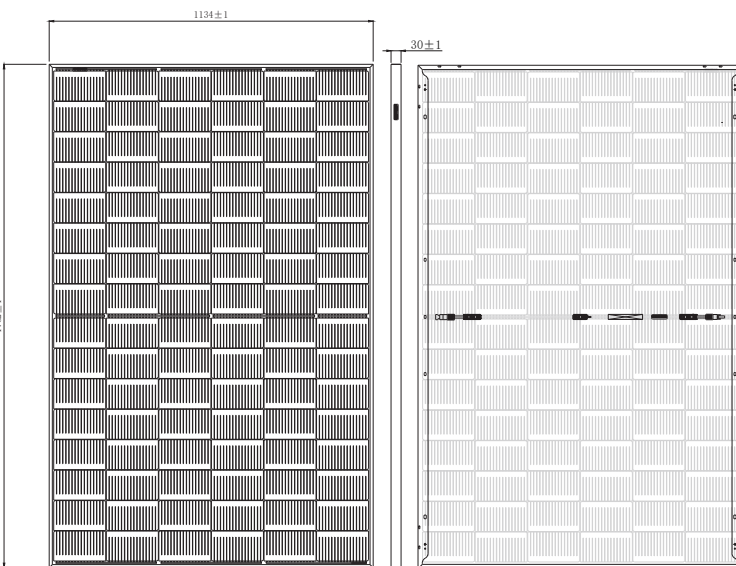

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

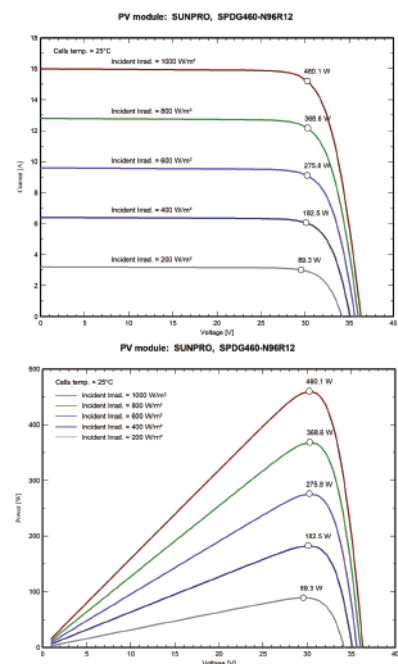

Zhejiang Sunpro Power Technology Co., Ltd

Add: Qinggang Industrial Zone, Yuhuan City, Zhejiang Province

Tel: +86 0576-80730906 E-mail: info@sunpropower.com Website: www.sunpropower.com

*The above parameters are for reference only, and the actual parameters of the factory shall prevail

Certificate Holder Name: Zhejiang Sunpro Power Technology Co., Ltd. (Only Available In Australia)