



# Inverter RS 48/6000 Smart

www.victronenergy.com

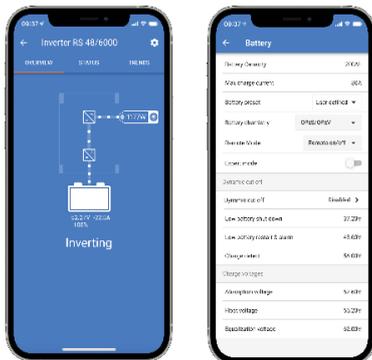

**Inverter RS Smart 48/6000**



### Configure and monitor with VictronConnect

A built-in Smart Bluetooth connection allows for quick monitoring or settings adjustment of the Inverter RS.

### Light weight, efficient and quiet

Thanks to high frequency technology and a new design this powerful inverter weighs only 11 kg. In addition to this it has an excellent efficiency, low standby power, and a very quiet operation.

### Display and Bluetooth

The display reads battery and inverter parameters.

The same parameters can be accessed with a smartphone or other Bluetooth enabled device. In addition, Bluetooth can be used to set up the system and to change settings with VictronConnect.

### VE.Can and VE.Direct port

VE.Can connection to a GX device for system monitoring, data logging, and remote firmware updates. VE.Direct connection to a GlobalLink 520 for remote data monitoring.

### I/O Connections

Programmable Relay, temperature sensor and voltage sensor connections. The remote input can also be configured to accept the Victron smallBMS.

Inverter RS Smart	48/6000	
<b>INVERTER</b>		
DC Input voltage range	38 – 62 V <sup>(4)</sup>	
Output	Output voltage: 230 VAC ± 2 % Frequency: 50 Hz ± 0.1 % <sup>(1)</sup> Maximum continuous inverter current: 25 Aac Increases linearly from 4800 W at 46 VDC to 5300 W at 52 VDC	
Continuous output power at 25 °C	4500 W	
Continuous output power at 40 °C	3000 W	
Continuous output power at 65 °C	9 kW for 3 seconds 7 kW for 4 minutes	
Peak power	50 A	
Short-circuit output current	96.5 % at 1 kW load 94 % at 5 kW load	
Maximum efficiency	20 W	
Zero load power	<b>CHARGER</b>	
Programmable Charger voltage range (VDC)	36 – 60 V	
Charge voltage 'absorption' (VDC)	Default setting: 57,6 V (adjustable)	
Charge voltage 'float' (VDC)	Default setting: 55,2 V (adjustable)	
Maximum charge current	88 A @ 57,6V	
Battery temperature sensor	Included	
Battery voltage sense	Yes	
<b>GENERAL</b>		
Parallel and 3-phase operation	12 parallel units supported, 3 phase supports 4 units per phase	
Programmable relay <sup>(3)</sup>	Yes	
Protection <sup>(2)</sup>	a - g	
Data Communications	VE.Direct port, VE.Can port & Bluetooth	
Bluetooth frequency & power	2402 – 2480 MHz, 4dBm	
General purpose analogue/digital in port	Yes, 2x	
Remote on-off	Yes	
Operating temperature range	-40 to +65 °C (fan assisted cooling)	
Maximum altitude	2000 m	
Humidity (non-condensing)	max 95 %	
<b>ENCLOSURE</b>		
Material & Colour	steel, blue RAL 5012	
Protection category	IP21	
Battery-connection	M8 bolts	
230 VAC-connection	Screw terminals 10 mm <sup>2</sup> (6 AWG)	
Weight	11 kg	
Dimensions (hxwx d)	425 x 440 x 125 mm	
<b>STANDARDS</b>		
Safety	EN-IEC 60335-1, EN-IEC 62109-1, EN-IEC 62109-2	
Emission, Immunity	EN 55014-1, EN 55014-2, EN-IEC 61000-3-2, EN-IEC 61000-3-3 IEC 61000-6-1, IEC 61000-6-2, IEC 61000-6-3	

1) Can be adjusted to 60 Hz.

2) Protection key: a) output short circuit b) overload c) battery voltage too high d) battery voltage too low e) temperature too high f) 230 VAC on inverter output g) Solar earth leakage.

3) Programmable relay which can be set for general alarm, DC under voltage or genset start/stop function. DC rating: 4A up to 35 VDC and 1 A up to 70 VDC.

4) Minimum start-up voltage is 41 V. Inverter shutdown can be set as low as 32 VDC, but may shut down on low AC output voltage (due to load). Over-voltage disconnect is 65.5 V.